




LED COB 2EYE LIGHT 200W COB LED

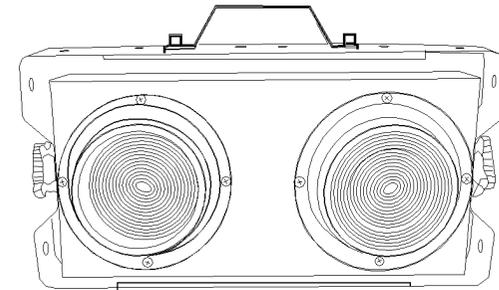

MANUAL

Thank you for purchasing this product. Please read user guide for safety and operating information before using the product. Keep this manual for future reference. All products have been Rigorous tested before selling out, also it can reach their best effects.

CE
RoHS

Thanks for your choosing our product, which adopts the latest light source-LED. It overcomes the disadvantages of traditional light source(Such as high electricity consumption, short life, high temperature, etc).LED can save much energy, with long life, high brightness, bright colors. It is the ideal product on all kinds of lighting fields at present.

SAFTY NOTE

- 1、 This unit belongs to class 1 protective lights, so the lights must be grounded well。 Should be grounded by the professional.
- 2、 Please confirm the voltage is among the setting value.
- 3、 Please confirm the power cord is undamaged.
- 4、 Please cut off the power before cleaning the lights or you don't operate.
- 5、 Only permit to connect the power code with the plug. Don't use knife to drag the power code when unplugging.
- 6、 Be careful when you install the light .Avoid to touch the bare wine, or you will suffer from electric shock.
- 7、 Don't look straight at the light source when the light is on use,or it will hurt eyes.
- 8、 When choosing the installing position, please confirm the light is not exposed in the high temperature, moist or dusty place.
- 9、 Please use proper applicable and safe wines to connect the light.
- 10、 Please operate it after you well know the light's function. Note: the light have to be operated by the professional. Don't shake at will and rude operation.
- 11、 Please don't modify the light at will, which probably cause short circuit, burn, electric shock, etc. Because of it, the manufacturer won't offer warranty for the damage.

It can be controlled by the standard DMX512 signal,can run alone via the address code, also can master/slave control. It is very convenient.

A.DMX-512 5CH control;:

(1) DMX d001 5Channels:

CHANNEL	FUNCTION	VALUE	COLOR FUNCTION
CH1	COB(1-4)Dimmer	0-255	Dimmer 0% - 100%
CH2	Dimmer	0-255	COB 1 WW 0-100%
CH3	Dimmer	0-255	COB 2 WC 0-100%
CH4	Strobe	1-255	Strobe
CH5	32 Dimming	0-3 4-63 64-127 128-191 192-255	Lnvalid fast Dim1 fast Dim2 Slow Dim3 Slow Dim4

(2) A. Menu Mode

NUMBER	LED SCREEN
1	Address d001
2	T.043(Working temperature)
3	P000 0-255
4	L000 0-255
5	E000 0-255
6	Soud
7	u000 0-255
8	U000 0-255
9	F000 0-255

B. Technical Specification:

- Product: LED COB 2EYE LIGHT
- Light Source : 2PCS X100W LED
- Power consumption: 200W
- Voltage: 100V~260VAC/50~60Hz
- Fuse: 3A